



- Put the rod on the pivot between the two jaws.
- Place the springs.


(Be attentive to the position of your hands and the trap during this operation).

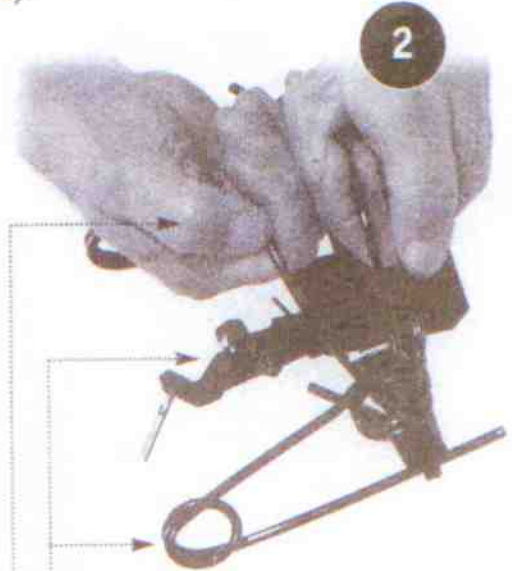

- The springs must be positioned on the same side as the trigger.
- Open the jaws by hand.

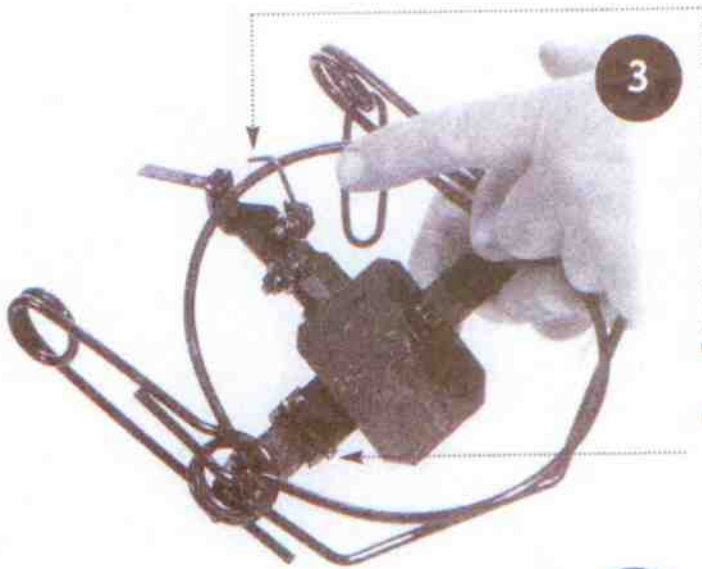

- Attach the jaws with the security hook.
- Replace the rod on the pivot under the pan.

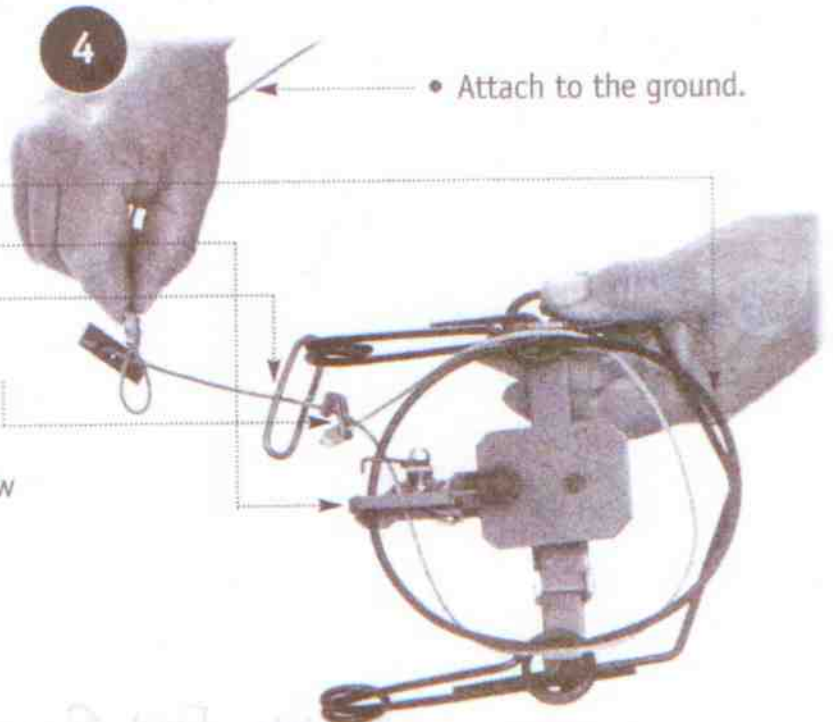

- Position of the snare is very important
 - Between the double jaws;
 - Under the single jaw;
 - Under the trigger (dog);
 - Through the ring;
- Retighten the snare under the jaws;
- Lower the trigger down over the jaw and lift the pan.
- Remove the security hook **after** the trap is in place. **(don't forget!).**

- Attach to the ground.

POSSIBLE FOR SNARE IN PRODUCTION