

5. Secure trap by placing a 1/4' thick dowel through the opening of the coiled spring and into the soil so that the tip is visible about the ground but deep enough so that it is secure.
6. Repeat steps 4 and 5 for other tunnel, inserting the second trap.
7. After both traps have been properly set and inserted, take grass/sod patch removed in Step 2 and place it diagonally over the trap and opening of the tunnel (figure 3). The grass blades should point toward the trap. Repeat the procedure for the other trap. Fill the hole with loose dirt. (figure 3)

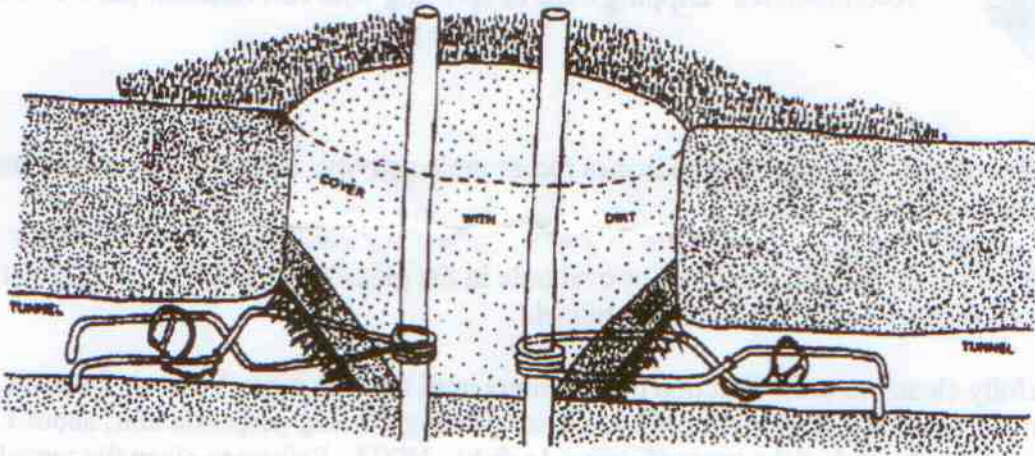


figure 3

8. Check the traps every 2-3 days or after a rain. Remove the loose dirt and then lift the sod to see if each trap contains a mole or if it is snapped.
9. If the trap(s) are not snapped, then cover as indicated in step 7. If snapped, reset and recover.

***CAUTION:** Do not set the traps in any locations where children or pets play.

NOTICE TO BUYER AND USER: Seller warrants that this product conforms to the description on the label and is reasonably fit to the purposes stated on the label when used in accordance with directions under normal conditions of use. This warranty does not extend to the use of the product contrary to label instructions, or under abnormal conditions or under conditions not reasonable foreseeable to Seller and Buyer and so User assumes the risk of such use. SELLER DISCLAIMS ALL OTHER WARRANTIES EXPRESSED OR IMPLIED CONSEQUENTIAL, SPECIAL OR INDIRECT DAMAGES RESULTING FROM THE USE OF HANDLING OF THIS PRODUCT AND SELLER'S SOLE LIABILITY AND BUYER'S AND USER'S EXCLUSIVE REMEDY SHALL BE LIMITED TO THE REFUND OF THE PURCHASE PRICE.